
# ADDERLink Infinity

## High Performance IP KVM Powering Real-Time, Pixel Perfect, Control of Devices Anywhere on your Network, Anywhere in the World




The multi award-winning ADDERLink INFINITY range gives your business infinite opportunities. It is designed to enhance your operational effectiveness, improve inter-team collaboration, streamline IT workflows, secure your network and so much more.

Trusted by organizations around the world, the ADDERLink INFINITY range can be used as a point-to-point extender, or as an IP KVM matrix utilizing your existing IP network, to give thousands of users real-time access to their computers - no matter where they are based.

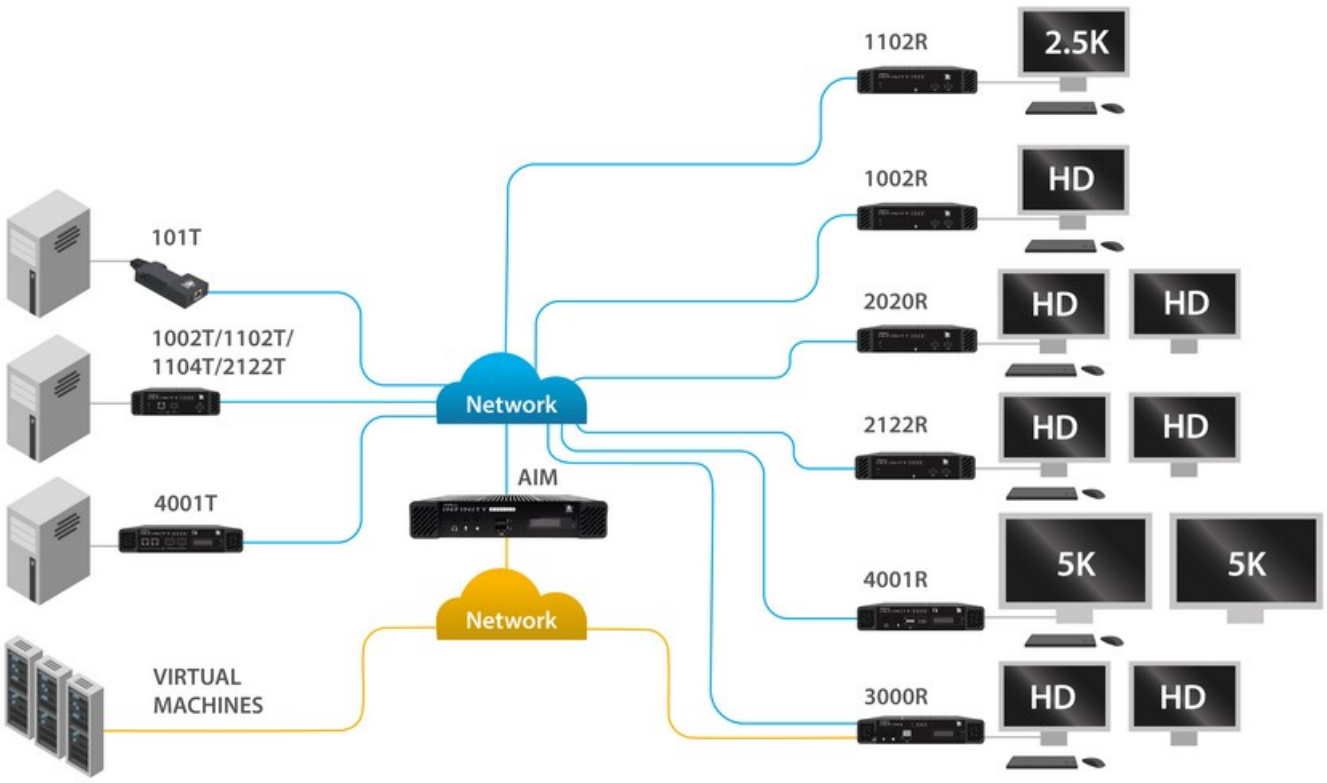


Businesses constantly upsize and downsize, reorganize and re-focus, and KVM needs to be flexible enough to adapt with them. It is normal for a company`s data systems to grow or shrink significantly during the lifetime of a KVM system, and the technology must be able to adapt.

Designing an Adder IP KVM matrix could not be easier. Organizations are no longer tied to the limitations of a single switch and can instead create networks to meet their operational needs.

### Discover the ADDERLink INFINITY Range

| Part | Video | Connectors | USB | Audio | Network | Extra Features |
|---|---|---|---|---|---|---|
| Transmitter | | | | | | |
| ALIF101T DP | 1 @ up to 2560x1600 | DP | USB 2.0 Type A | DisplayPort digital audio plus bi-directional | 1 x RJ45 | - |

| | | | | | | |
|---|---|---|---|---|---|---|
| | | | | USB audio | | |
| ALIF101T HDMI | 1 @ up to 2560x1600 | HDMI | USB 2.0 Type A | HDMI digital audio plus bi-directional USB audio | 1 x RJ45 | - |
| ALIF 101T DVI | 1 @ up to 1920x1200 | DVI | USB 2.0 Type A | BI-directional USB audio 2 channel 16bit 48KHz | 1 x RJ45 | - |
| ALIF100T VGA | 1 @ up to 1920x1200 | VGA | USB 1.2 Type A | Bi-directional USB audio 2 channel 16bit 48KHz | 1 x RJ45 | - |
| ALIF1002T | 1 @ up to 1920x1200 | DVI | USB 2.0 Type B | Bi-directional Analog 2 x 3.5mm audio jack | 1 x RJ45, 1 x SFP | RS232 |
| ALIF1102T | 1 @ up to 2560x1600 | DP | USB 2.0 Type A, USB 2.0 Type B | Bi-directional USB audio 2 channel 16bit @ 48KHz | 1 x RJ45, 1 x SFP | RS232 (via USB Converter) |
| ALIF1104T | 1 @ up to 2560x1600 | HDMI | USB 2.0 Type A, USB 2.0 Type B | Bi-directional USB audio 2 channel 16bit @ 48KHz | 1 x RJ45, 1 x SFP | RS232 (via USB Converter) |
| ALIF2002T | 2 @ up to 1920x1200 / 1 @ up to 2560x1600 | DVI (Dual-link) | USB 2.0 Type B | Bi-directional Analog 2 x 3.5mm audio jack | 1 x RJ45, 1 x SFP | RS232 |

| | | | | | | |
|---|---|---|---|---|---|---|
| ALIF2020T | 2 @ up to 1920x1200 | DVI | USB 2.0 Type B | Bi-directional Analog 2 x 3.5mm audio jack | 1 x RJ45, 1 x SFP | RS232 |
| ALIF2112T | 2 @ up to 1920x1200 / 1 @ up to 2560x1600 | DVI (Dual-link) | USB 2.0 Type B | Bi-directional Analog 2 x 3.5mm audio jack | 1 x RJ45, 1 x SFP | RS232 + RealVNC Gateway |
| ALIF2122T | 2 @ up to 1920x1200 / 1 @ up to 2560x1600 | DP | USB 2.0 Type B | Bi-directional USB audio 2 channel 16bit @ 48KHz | 1 x RJ45/SFP, 1 x SFP | RS232 (via USB Converter) |
| ALIF2124T | 2 @ up to 1920x1200 / 1 @ up to 2560x1600 | HDMI | USB 2.0 Type A, USB 2.0 Type B | Bi-directional USB audio 2 channel 16bit @ 48KHz | 1 x RJ45/SFP, 1 x SFP | RS232 (via USB Converter) |
| ALIF4001T | 2 @ up to 5120x2880 | DP | USB 2.0 Type B | DisplayPort digital audio plus bi-directional analog via 2 x 3.5mm audio jack | 2 x SFP+ | RS232 |
| Receivers | | | | | | |
| ALIF1002R | 1 @ up to 1920x1200 | DVI | 4-Port USB 2.0 hub | Bi-directional analog via 2 x 3.5mm audio jack | 1 x RJ45, 1 x SFP | RS232 |
| ALIF1102R | 1 @ up to 2560x1600 | DP | 4-Port USB 2.0 hub | Bi-directional analog via 2 x 3.5mm audio jack | 1 x RJ45, 1 x SFP | RS232 (via USB Converter) |

| | | | | | | |
|---|---|---|---|---|---|---|
| ALIF2020R | 2 @ up to 1920x1200 | DVI | 4-Port USB 2.0 hub | Bi-directional analog via 2 x 3.5mm audio jack | 1 x RJ45, 1 x SFP | RS232 |
| ALIF2122R | 2 @ up to 1920x1200 / 1 @ up to 2560x1600 | DP | 4-Port USB 2.0 hub | Bi-directional analog via 2 x 3.5mm audio jack | 1 x RJ45/SFP, 1 x SFP | RS232 (via USB Converter) |
| ALIF3000R | 2 @ up to 1920x1200 / 1 @ up to 2560x1600 | DP | 4-Port USB 2.0 hub | Bi-directional analog via 2 x 3.5mm audio jack | 1 x RJ45 1 x SFP | Virtual Machine Access |
| ALIF4001R | 2 @ up to 5120x2880 | DP | 5-Port USB 2.0 hub | DisplayPort digital audio plus bi-directional analog via 2 x 3,5mm audio jack | 2 x SFP+ | RS232 (via USB Converter) |